Gibson®

Product Line

A2L Compliant Equipment with SEER2/HSPF2 Efficiency Standards

Up to 96% AFUE Gas Furnaces

All gas furnaces except KG8SA & FG8SD feature SmartLite® Control Boards



KG7TE-FS, KG7TN-FS
Up to 96% AFUE Ultra High Efficiency, Direct Vent or Non-Direct Vent, Condensing, 2-Stage, (Dedicated Upflow), (Downflow), Multi-Speed ECM Blower Motor, (35,000 - 115,000), (60,000 - 115,000) BTUH Input

Up to 95%+ AFUE Ultra-Low NOx Gas Furnaces



FG8SD-FS
Up to 95%+ AFUE Ultra-Low NOx, High Efficiency, 1-Stage Upflow/Horizontal, Multi-Speed ECM Blower Motor, 50,000 - 100,000 BTUH Input

Up to 95% AFUE Gas Furnaces



KG7TC-FS
Up to 95% AFUE High Efficiency, Direct Vent or Non-Direct Vent, Condensing, 2-Stage Upflow/Horizontal, Multi-Speed ECM Blower Motor, 60,000 - 120,000 BTUH Input



KG7SD-FS
Up to 95% AFUE High Efficiency, Direct Vent or Non-Direct Vent, Condensing, 1-Stage, Upflow, Multi-Speed ECM Blower Motor, 38,000 - 120,000, BTUH Input

Up to 92% AFUE Gas Furnaces



KG7SC-FS
Up to 92% AFUE High Efficiency, Direct Vent or Non-Direct Vent, Condensing, 1-Stage, Upflow/ Horizontal, Multi-Speed ECM Blower Motor, 38,000 - 120,000 BTUH Input

Up to 80% AFUE Ultra-Low NOx Gas Furnaces



KG8SA-FS
Up to 80% AFUE Ultra-Low NOx, Standard Efficiency, 1-Stage Upflow/Horizontal, Multi-Speed ECM Blower Motor, 55,000 - 100,000 BTUH Input

80% AFUE Gas Furnaces



KG7TA-FS
80% AFUE Mid Efficiency, 2-Stage, Upflow/Horizontal, Multi-Speed ECM Blower Motor, 60,000 - 120,000 BTUH Input

KG7SA-FS
80% AFUE Standard Efficiency, 1-Stage Upflow/Horizontal, Multi-Speed ECM Blower Motor, 45,000 - 126,000 BTUH Input



KG7SK-FS
80% AFUE Standard Efficiency, 1-Stage Downflow, Multi-Speed ECM Blower Motor, 54,000 - 126,000 BTUH Input

Horizontal Airflow Packaged Systems



P95RD
Single Packaged Air Conditioner, Round Duct Connections, Horizontal Airflow, 13.4 SEER2, 2 - 5 Ton



Q95RD
Single Packaged Heat Pump, Round Duct Connections, Horizontal Airflow, 13.4 SEER2, 6.7 HSPF2, 2 - 5 Ton

Split Systems Air Conditioners



WSA4BE
High Efficiency, Up to 14.3 SEER2, Air Conditioner, Single-Stage, 1-1/2 - 5 Ton Capacity



WSA4BD
Base Efficiency, 13.4 SEER2, Single-Stage, Air Conditioner, 1-1/2 - 5 Ton Capacity

Split Systems Heat Pumps



WSH4BE
High Efficiency, 14.3 SEER2, 7.5 HSPF2, Single-Stage, Heat Pump, 1-1/2 - 5 Ton Capacity




Air Handlers


B65VMMX
2-Stage, ECM Variable-Speed Motor, Multi-Poised, Air Handler, TXV

B65EMMX
ECM Fixed-Speed Motor, Multi-Poised, Air Handler, TXV

B65BMMX
PSC Motor, Multi-Poised, Vertical/ Horizontal, Multi-Speed, Air Handler, TXV

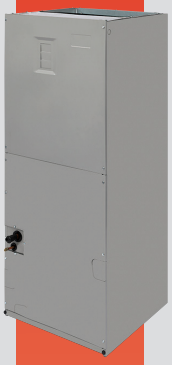

GMH
Multi-Poised, Vertical/ Horizontal, High Static, Air Handler for the Ultra Side Discharge Condenser



MB75EM
115V Modular, Fixed-Speed ECM Blower (matched with a cased coil easily creates a 2 piece Air Handler)



MB75VM
Modular , Variable-Speed Model (matched with a cased coil easily creates a 2 piece Air Handler)



Indoor Coils

C75BAM0
Vertical, Fixed Orifice, Cased,
A, B, C and D sizes available in various capacities



C75BHM0
Horizontal, Fixed Orifice, Cased,
A, B, C and D sizes available in various capacities



C75BAMX
Vertical, TXV, Cased,
A, B, C and D sizes available in various capacities



C75BHMX
Horizontal, TXV, Cased,
A, B, C and D sizes available in various capacities



ENERGY STAR PARTNER

SEER2, HSPF2 & EER2 REQUIREMENTS

ENERGY STAR® certification is awarded to products designed to reduce energy consumption and utility costs.

Packaged systems must have a Seasonal Energy Efficiency Ratio 2 (SEER2) rating of 15.2 and an Energy Efficiency Ratio 2 (EER2) of 11.5. Packaged heat pumps in the south must have a SEER2 rating of 15.2, Heating Seasonal Performance Factor 2 (HSPF2) of 7.2 and an Energy Efficiency Ratio 2 (EER2) of 10.6. Packaged heat pumps in the north must have a SEER2 rating of 15.2, Heating Seasonal Performance Factor 2 (HSPF2) of 8.1 and an Energy Efficiency Ratio 2 (EER2) of 10.0.

Split system air conditioners must have a 15.2 SEER2 rating and an EER2 of 12.0. Split system heat pumps south must have a 15.2 SEER2 rating, an HSPF2 of 7.8 and an EER2 of 11.7. Split system heat pumps north must have a 15.2 SEER2 rating, an HSPF2 of 8.1 and an EER2 of 10.0.

AFUE REQUIREMENTS

To qualify, gas furnaces must have an AFUE of 97%.

10 YEAR WARRANTY Gibson

Gibson split system air conditioners and heat pumps offer a 10-Year limited warranty that covers all parts when registered as part of a complete Gibson system. Air handlers and coils carry a 3-Year all parts limited warranty and when installed with a matched outdoor unit, will carry the outdoor system warranty. All Gibson gas furnaces and packaged systems offer a 10-Year limited warranty that covers all parts when registered. Additionally, Gibson gas furnaces and gas/electric packaged systems carry a limited lifetime warranty on the heat exchanger. To learn more about our product warranties, ask your Gibson contractor.

Gibson ductless mini-split systems offer a 5-Year limited parts warranty, compressors carry a 7-Year warranty.

Flex Match Mini Split Heat Pump Systems


DXH_(_)FMK3IH
Up to 21 SEER2, up to 10.0 HSPF2, 1 to 5 IDUs, 18K to 42K BTU, Multi-Zone, Mini Split Heat Pump ODU, 208/230 Volt, 60 Hz, 1-Phase



DHH_(_)PUK3IH
Up to 25 SEER2, 9K to 24K BTU, Multi-Zone, Mini Split Wall Mount IDU, 208/230 Volt, 60 Hz, 1-Phase. Up to 21 SEER2 when matched with multizone system.



DKH_(_)FMK3IH
Up to 21 SEER2, 9K to 24K BTU, Multi-Zone, Mini Split 8-Way Cassette IDU, 208/230 Volt, 60 Hz, 1-Phase



Mini Split Remotes & Controllers

WLRC20
Remote Wireless, All 19 SEER2 and 25 SEER2 single zone



WLRC19
Remote Wireless, Cassette



WRC3
Optional Controller, Wired, Flex Match for Ducted and Cassette IDUs



Mini Split Heat Pump Systems

DXH_(_)PSK3IH
Up to 25 SEER2 and 12.0 HSPF2, 12K-24K BTU, Up to 26 SEER2 and 10.4 HSPF2 9k BTU, Single-Zone, Mini Split Heat Pump ODU, 208/230 Volt, 60 Hz, 1-Phase



DHH_(_)PUK3IH
Up to 25 SEER2 and 12.0 HSPF2, 12K-24K BTU, Up to 26 SEER2 and 10.4 HSPF2 9k BTU when matched one-to-one minisplits; Multi-Zone, Mini Split Wall Mount IDU, 208/230 Volt, 60 Hz, 1-Phase



DXH_(_)ESK3IL
Up to 19 SEER2 and up to 9.5HSPF2 for 12K, 24K, and 36K BTU; Up to 20.5 SEER2 and up to 8.8 HSPF2 9K BTU 230V; Up to 22 SEER2 and up to 9 HSPF2 30K BTU, Single-Zone, Mini Split Heat Pump ODU, 230 Volt, 60 Hz, 1-Phase



DHH_(_)ESK3IL
Up to 19 SEER2 and up to 9.5HSPF2 for 12K, 24K, and 36K BTU; Up to 20.5 SEER2 and up to 8.8 HSPF2 9K BTU 230V; Up to 22 SEER2 and up to 9 HSPF2 30K BTU, Single-Zone, Mini Split Wall Mount IDU, 230 Volt, 60 Hz, 1-Phase



DXH_(_)ESA3IL
Up to 20.5 SEER2 and up to 8.8 HSPF2 9K BTU 115V; Up to 19 SEER2 and up to 9.5 HSPF2 12K BTU, Single-Zone, Mini Split Heat Pump ODU, 115 Volt, 60 Hz, 1-Phase



DHH_(_)ESA3IL
Up to 20.5 SEER2 and up to 8.8 HSPF2 9K BTU 115V; Up to 19 SEER2 and up to 9.5 HSPF2 12K BTU, Single-Zone, Mini Split Wall Mount IDU, 115 Volt, 60 Hz, 1-Phase



Gas Furnace, Packaged System & Split System Accessories

Media Air Cleaner
MERV 14, long life media filter, removes airborne particles down to 0.3 microns



Thermostats
Universal, Programmable
7-day, 24V, digital, up to 3 heat/2 cool, backlit display + keypad, auto or manual changeover



Gibson®

Specifications and illustrations subject to change without incurring obligation.

www.gibsonhvac.com

Gibson® is a registered trademark used under license from Gibson International Company, U.S.A. SmartLite® is a registered trademark of Nordyne, LLC. © Nordyne, LLC 2025. All Rights Reserved. Printed in U.S.A.

833F-1124